




5W Interchangeable Plug Series PSA05R Adapter

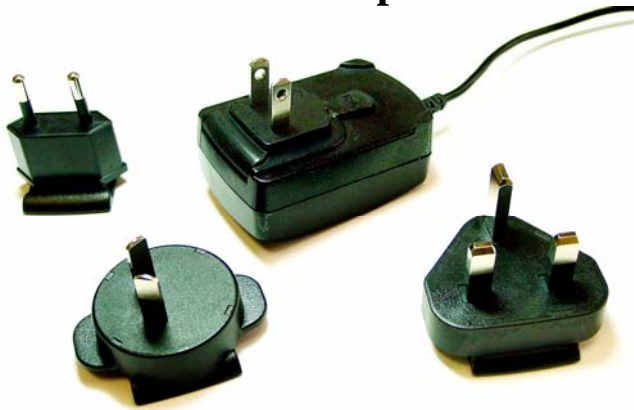

Features

- Double Insulated
- Field Changeable AC Plugs
- CEC Compliant (Efficiency Level IV) *
- Low Leakage Current
- Low Cost
- Class B EMI

Applications

- MPEG Players
- PDA
- Personal Electronics
- Digital Camera

Safety Approvals

- cUL/UL
- TÜV
- SAA
- CE
- C-Tick

Mechanical Characteristics

- Length: 71.7mm (2.82in)
- Width: 45mm (1.77in)
- Height: 28.9mm (1.14in)
- Weight: 120g (4oz)

Output Specifications

Model	DC Output Voltage	Load		Ripple (1) P-P (max)	Regulation	
		Min.	Max.		Line	Load
PSA05R-033*	3.3V	0A	1.2A	50mV	±5%	
PSA05R-050	5V	0A	1A	50mV	±5%	
PSA05R-090	9V	0A	0.56A	90mV	±5%	
PSA05R-120	12V	0A	0.42A	120mV	±5%	

Note: (1) Measured after 10 minutes with by-pass capacitors 0.1uf // 10uf at output connector terminal.

* PSA05R-033 is not CEC compliant.

Phihong is not responsible for any error and change. Content is subject to change without notice. Please consult the factory and visit www.phihong.com for the most up-to-date specifications.

INPUT:

AC Input Voltage Rating

100 to 240VAC

AC Input Voltage Range

90 to 264VAC

AC Input Current

0.25A(RMS) max. @ 120VAC
0.125A(RMS) max. @ 240VAC

Leakage Current

0.25mA max. @ 254VAC

Inrush Current (cold)

<30A for 120VAC at max. load
<60A for 240VAC at max. load
(Cold start @ ambient 25°C)

Input Power Saving

0.5W max. for 240VAC at no load

OUTPUT:

Efficiency

60% Min.

Hold-up Time

10mS min. @ 120VAC and max. load

Circuit Protection

>120%, auto restart

Over-voltage Protection

>120%, Zener Clamp

ENVIRONMENTAL:

Temperature

Operation 0 to +40°C
Non-operation -25 to +85°C

Humidity

Operation 10 to 90%

Emissions

FCC Class B
EN55022 Class B

Dielectric Withstand (Hi-pot) Test

Primary to Secondary: 3000VAC

DC Output Connector

2.1x5.5mm Center Positive Standard

Mating Connector

Kycon KLD-0202-A or equivalent

AC Input Clips (sold separately)

US: RPA
Europe: RPE
UK: RPK
Australia: RPS

Dimension Diagram Unit: mm (inch)

