


APL-PITX-N3350-N



Specifications

CPU	Intel® Apollo Lake N3350 2.40GHz (Burst) 1.10GHz Dual Core Intel® Apollo Lake N4200 2.50GHz (Burst) 1.10GHz Quad Core (Option)		
RAM	DDR3L 1866MHz memory support up to 8GB in SO-DIMM slot x1		
BIOS	AMI BIOS		
Expansion	MiniPCIe (full-size) x1		
Display	Intel® HD Graphics with MultiDisplay support HDMI: resolution support up to 3840 x 2160 at 60Hz LVDS: resolution support up to 1920 x 1080 at 60Hz		
Audio	Realtek ALC662VD/ALC888S		
LAN	Realtek RTL8111H GigaLAN x1		
Disk Support	M.2 SATA x1	SATA device x1	
I/O Interface	USB (ver. 3.0) x2 SMBus x1	USB (ver. 2.0) x2 8-bit GPIO x1	COM x2 (1x RS232/422/485) SIM card holder x1
Connectors	2-pin header for Buzzer x1 7-pin SATA connector for SATA x1 9-pin header for COM x2 HDMI connector x1 RJ45 connector x1	4-pin header for SMBus x1 9-pin header for USB2.0 x1 10-pin header for GPIO x1 M.2 slot (M key 2242) for M.2 SATA x1 SIM card holder x1	4-pin wafer for SATA power output x1 9-pin header for Line-in, Line-out, and MIC-in x1 30-pin wafer for LVDS x1 Power jack for 12VDC input x1 USB connector for USB3.0 x2
Power Requirement	12VDC standard input from power jack support for ATX/AT mode		
Operating Temperature	0°C to 60°C		
Dimension	100 x 72 mm		
O/S Support	Windows 10	Linux	

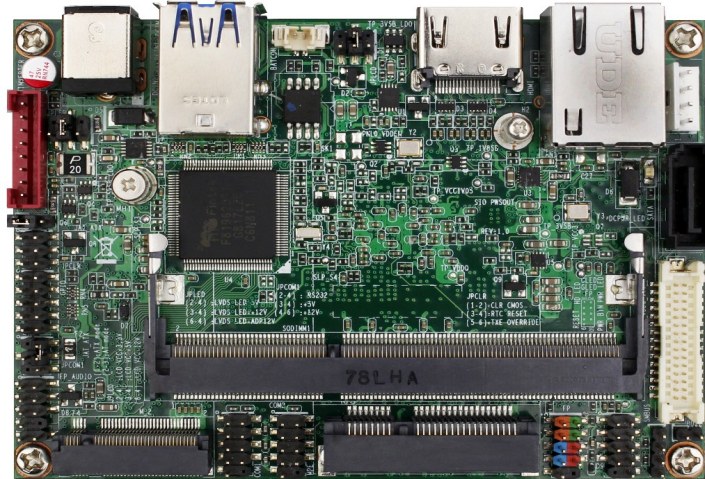