



Features


- 4x Serial Ports (3x RS232 & 1x RS232/422/485)
- 22x SoM Specific I/O Lines
- 10/100 BaseT Ethernet with Status LEDs
- Graphic LCD with TTL & LVDS Interfaces
- Resistive Touch Screen Interface
- 2x USB Host & 1x USB OTG Port
- I2S Audio Port with Line-In/Line-Out



Specifications (Actual I/O Availability is SoM Dependent)

Compatibility	EMAC 200-pin SODIMM socket		
Memory	Micro-SD card Slot		
I/O	22x SoM Specific I/O lines (GPIO, A/D, SPI, I2C)		
	4x Serial Ports (3x RS232 & 1x RS232/422/485)		
	1x I2S Audio port with Line-In/Line-Out		
	1x CAN 2.0B Port		
	10/100 BaseT Ethernet with Status LEDs		
	2x USB 2.0 High Speed Host port		
	1x USB 2.0 High Speed OTG port		
	Battery for nonvolatile RAM and Real Time Clock System Reset button 1x Audio Beeper		
Analog	4x Channels A/D		
Video	7" TFT Color LCD, 800 x 480 WVGA @ 256K Colors 330 (cd/m ²), Durability - Over one million touches		
	10" TFT LVDS Color LCD, 1024 x 600 WSVGA @ 256K Colors 250 (cd/m ²), Durability - Over one million touches		
	Backlight Brightness Control		
	4-Wire Analog Resistive Touch Screen		
Dimensions	Barebones: 6.55" x 4.15" (166mm x 105mm)	7" LCD 7.55" x 4.20" (192mm x 106mm)	10" LCD 10.35" x 5.76" (263mm x 146mm)
Power Req.	Input Voltage +12 to +26 Vdc.		
	Typical Running Current Consumption 350mA @12 Vdc including SoM, USB & LCD (Note: Up to 1.0A is Req. if USB Host is providing power to 3x USB devices)		
Environment	0° to 60°C Operating Temperature		
	90% Upper Operating Humidity		



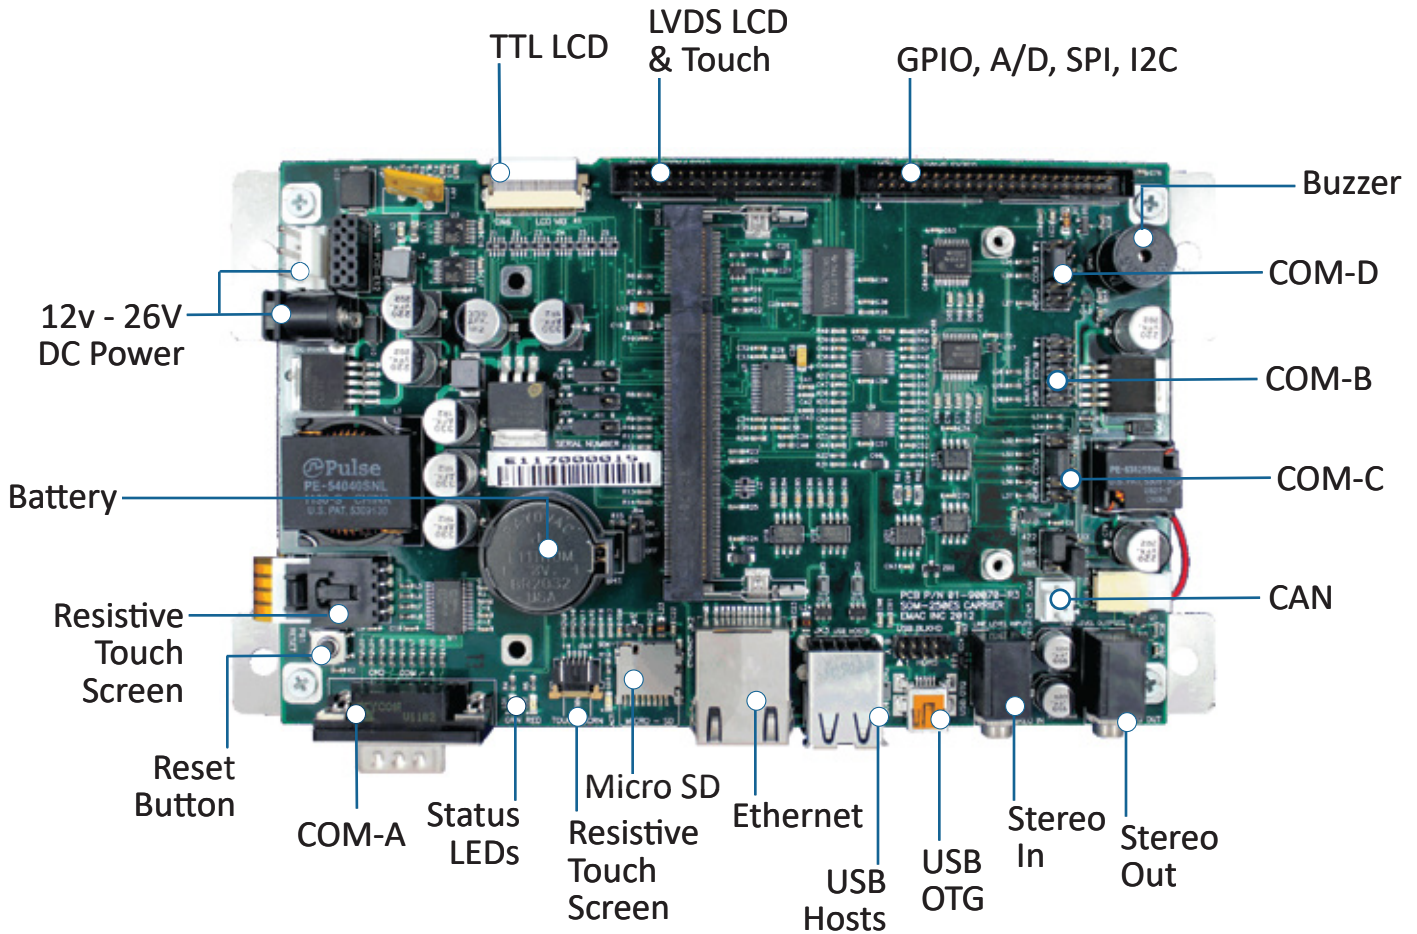

Carrier Board Options

PRODUCT #	DESCRIPTION
SoM-250ES-000	Standard Carrier Board with CAN, Audio, 7" LCD & Touch Screen
SoM-250ES-001	Deluxe Carrier Board with CAN, Audio, 10" LVDS LCD & Touch Screen
SoM-250ES-007	Bare-Bones Carrier Board without LCD

Optional Accessories

PRODUCT #	POWER SUPPLY
PER-PWR-00035	12V @ 2.1A Wall Power Supply (110 V @ 60 HZ US)
PER-PWR-00075	12V @ 2.1A, 90-264V @ 47-63Hz input, Universal power prongs for worldwide use, 2.1mm Barrel
PER-PWR-00090	12V @ 2.5A Desktop Power Supply, standard IEC 320-C14 input connector, 2.1mm barrel jack output

