

# ARK-2121F

Intel® Celeron® Quad Core J1900 SoC  
with Multiple I/Os Fanless Box PC



## Features

- Intel® Celeron® J1900 Quad Core 2.0 GHz SoC with Turbo boost support
- VGA and HDMI dual independent display
- 6 x COM, 6 x USB, isolated DIO
- 9 ~ 36 V<sub>DC</sub> wide range power input
- -20 ~ 70° C extend temperature operating
- Mini PCIe expansion with SIM holder for communication module
- mSATA and 1 x 2.5" SATA storage device
- Optional DVI/2nd HDMI/4x GbE by project support
- Internal USB for security dongle



susiAccess iManager




## Specifications

		ARK-2121F-U0A1E
Processor System	CPU	Intel Celeron Processor J1900 Quad Core SoC
	Frequency	2.0 GHz, turbo boost up to 2.42 GHz
	L2 Cache	2 MB
	BIOS	AMI EFI
Memory	Technology	DDR3L 1333 MHz
	Max. Capacity	8 GB
	Socket	1 x 204-pin SO-DIMM
Graphics	Chipset	Intel Celeron J1900 SoC integrated, 7th Gen. Intel Graphic core
	Graphic Engine	DirectX 11.1, OCL 1.2, OGL 3.2 Encode: H.264, MPEG2/4, VC1, WMV9 Decode: H.264, MPEG2
	VGA	Up to 2048 x 1152 @ 60Hz
	HDMI	1, HDMI 1.4a for HD video playback, 1080P at 60Hz
	DisplayPort*	Up to 2560 x 1600 at 60Hz (by project only)
	DVI-D	Up to 1920 x 1200 at 60Hz (by project only)
Ethernet	Dual Display	Yes, VGA + HDMI
	LAN1/LAN2	10/100/1000Mbps Intel i210 GbE, support Wake On LAN, optional LAN3/LAN4 support by project
Audio	Interface	Realtek ALC888S, High Definition Audio. Line-out, Mic-in, Line-in
	Serial Ports	6 x RS-232/422/485 with auto flow control
IO Interface	USB Interface	1 x USB 3.0, 5 x USB 2.0, 1 x internal USB 2.0 for security dongle
	PS/2	Yes ( by project only)
Other	Watchdog timer	255 levels timer interval, setup by software
Expansion	Mini PCIe	2 x full size Mini PCIe (1 with SIM holder)
Storage	HDD	Supports one SATA 2.5" HDD Bay (Compatible with 12.5mm height HDD) (Max. Data Transfer Rate 600 MB/s)
	mSATA	1 x full size mSATA socket, with USB signal co-lay
Software Support	Microsoft Windows	WES8, Windows 8, WES7, Windows 7
	Linux	Support by project
Power Requirement	Power Type	ATX
	Power Input Voltage	9 ~ 36 V <sub>DC</sub>
	Minimum Power Input	12 V, 1.5 A
Power Consumption	Power Adapter	AC to DC, DC19 V/3.42 A, 65 W (Optional)
	Typical	TBD
Mechanical	Max.	TBD
	Construction	Aluminum housing
	Mounting	Din-Rail mounting, Desk/wall-mounting, VESA mounting
	Dimensions (W x H x D)	264.5 x 68.4 x 133.0 mm (10.41" x 2.69" x 5.24")
Environment	Weight	2.3 kg (5.07 lb)
	Operating Temperature	With extended temperature peripherals: -20 ~ 70° C (-4 ~ 158° F) with 0.7m/s air flow With 2.5-inch hard disk 0 ~ 45° C (32 ~ 112° F) with 0.7m/s air flow
	Storage Temperature	- 40 ~ 85° C ( -40 ~ 185° F)
	Relative Humidity	95% @ 40° C (non-condensing)
	Vibration During Operation	With SSD: 5 Grms, IEC 60068-2-64, random, 5 ~ 500 Hz, 1 hr/axis.
	Shock During Operation	With SSD: 30 G, IEC 60068-2-27, half sine, 11 ms duration
	EMC	CE/FCC Class A, CCC, BSMI
Safety Certifications	UL, CB, CCC, BSMI	


\* DisplayPort is supported by project only.

## Dimensions


Unit: mm

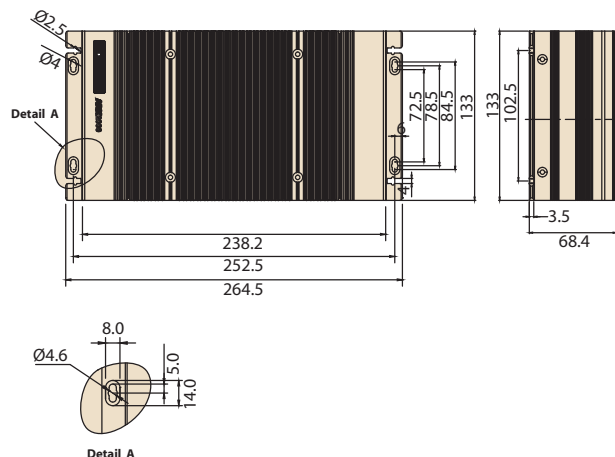


VESA mount

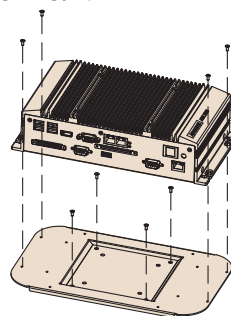


Wall mount




DIN Rail

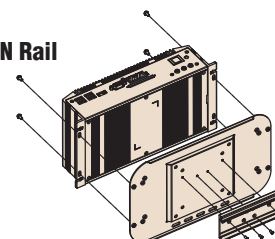

Front Panel External I/O Mechanical Layout/Drawing

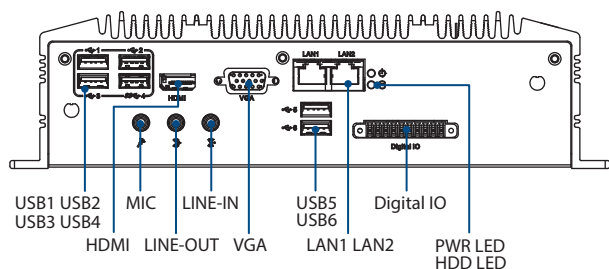

Rear Panel External I/O Mechanical Layout/Drawing

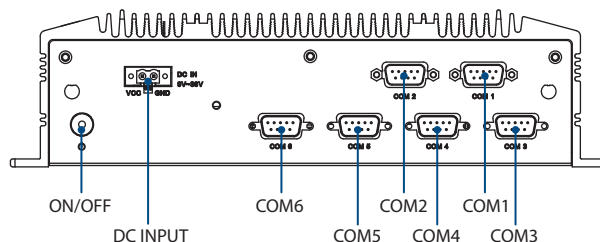

## Ordering Information

Part No.	CPU	VGA	HDMI/DP*	GbE	USB 2.0	USB 3.0	RS-232/422/485	Audio	Full-size MiniPCIe	SIM	mSATA	2.5" SATA II HDD Bay	Power Input	Operating Temp.
ARK-2121F-U0A1E	Intel Celeron J1900 2.0GHz	Yes	Yes	2	5	1	6	Lin-out, Line-in, MIC	2	1	1	1	9 - 36 V <sub>DC</sub>	-20 - 70° C

Note: Memory, storage and operating system bundled by request.

\*DP is support by project only.

## Packing List

Part Number	Description
-	1 x ARK-2121 Unit
-	1 x User Manual (Simplified Chinese)
-	1 x China RoHS
1700009001	1x 2-pin Phoenix to DC-Jack power cable

## Embedded OS

Part Number	Description
TBD	WES7E 64bit
TBD	WES8E 64bit

## Optional Items

Part Number	Description
TBD	AC-to-DC Adapter, DC 19V/3.42A 65W, 0 - 40° C for Home and Office Use
1700001947	Power cable 2-pin 180 cm, USA type (For adapter 1757003659)
1700001948	Power cable 2-pin 180 cm, Europe type (For adapter 1757003659)
1700001949	Power cable 2-pin 180 cm, UK type (For adapter 1757003659)
1700002141	Power cable 2-pin 180 cm, PSE type (For adapter 1757003659)
1757004595-01	AC-to-DC Adapter, DC 12V/3.33A 40W, -20 ~ +70° C
1702002600	Power cable 3-pin 180cm, USA type, for extend temperature power adapter
1702002605	Power cable 3-pin 180cm, EU type, for extend temperature power adapter
1702031801	Power cable 3-pin 180cm, UK type, for extend temperature power adapter
AMK-V004E	VESA mounting kit
AMK-R004E	DIN-rail mounting kit
1652003635	10pin DIO Plug in block